


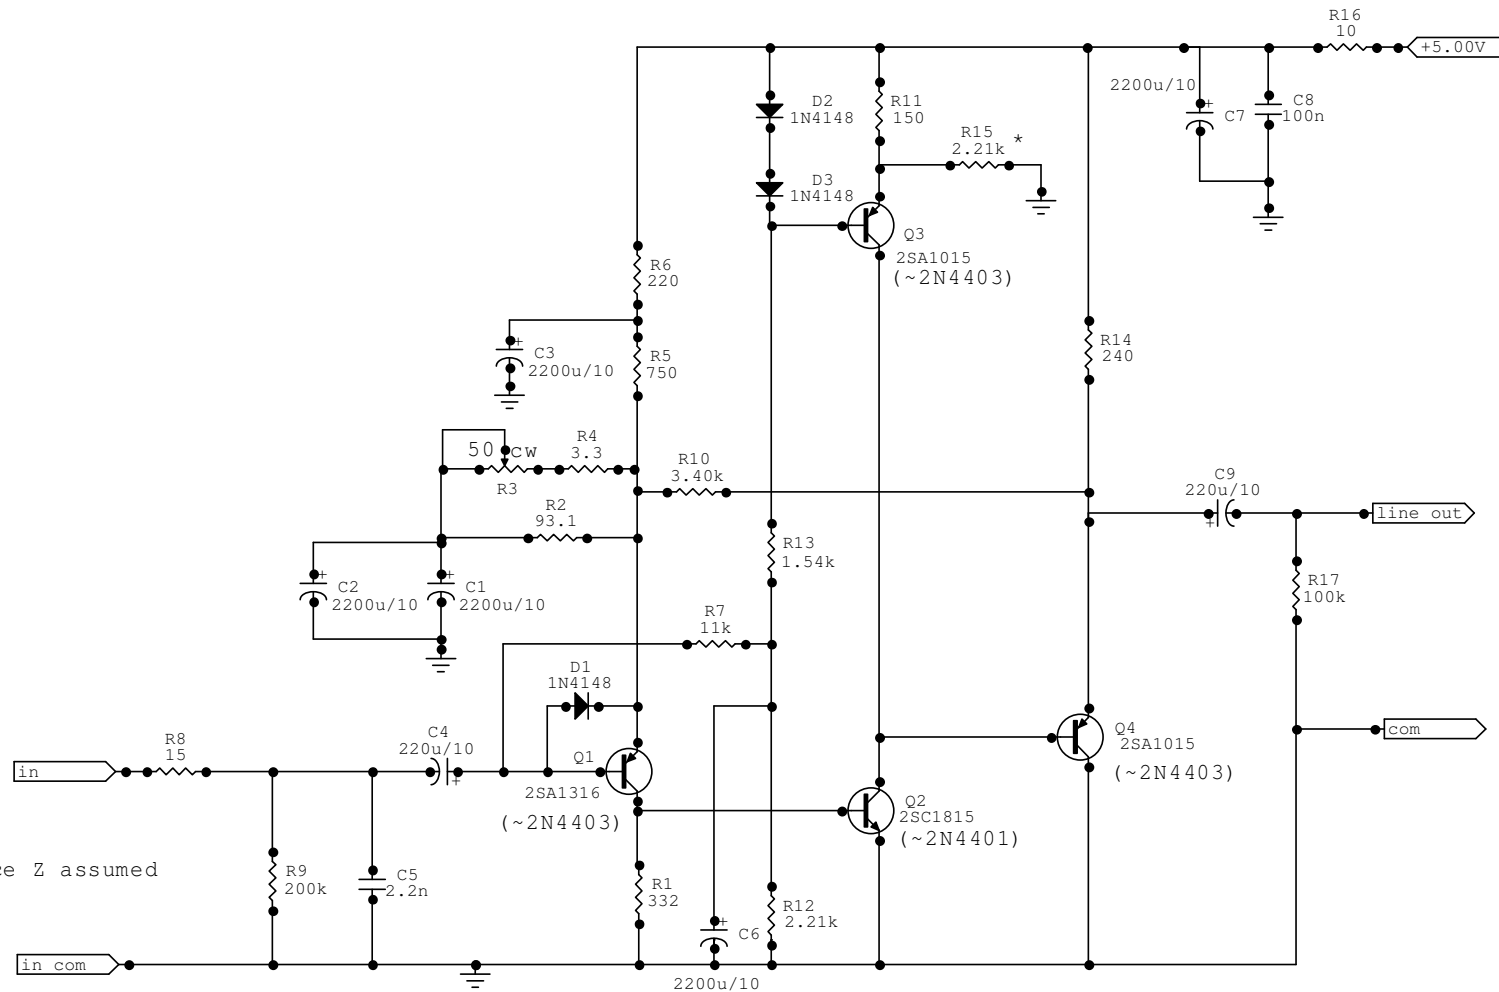

NOTES

* adjust for best power supply rejection, after setting output d.c. voltage

adjust R12 and/or R13 for about 2.84V d.c. out, for symmetrical output clipping

R3 adjusts gain, or use a pot after line out

Simple 5V SE Mic Pre

Av 40dB - 60dB